

20kW Rack Mountable Load Bank

Model SL20

RACK MOUNTABLE LOAD BANK WITH THE FOLLOWING FEATURES:

- 20kW at 240V, 18kW @ 230V, 15kW at 208V
- 500W resolution
- Variable airflow control
- Independent inputs allow for a balanced load in the rack without having to use multiple load banks
- Thumb screws allow for quick and easy installation without hardware
- Perfect for Room Validation Tests



COOLING SYSTEM

Forced air cooling via six high-speed muffic fans. Designed for continuous operation with no external power source required. Variable fan speed control provides airflow between 375 and 1585 CFM.

LOCAL OPERATOR CONTROL PANEL INCLUDING:

Digital meter displays amperage, voltage, and power. Rugged load toggle switches. Fan Speed controller. Indicator lights for Over Temp, Fans On and Load Step Engagement.

SAFETY FEATURES

- Over-temperature protection system
- Internal fuse protection of channel heater circuits

CONSTRUCTION

- Durable aluminum and galvanized steel construction with convenient carrying handles
- Specially designed for mounting in a standard 19" server rack.
- Height: 10U (17.5")
- Locating pins and quarter turn locking tabs for quick installation.
- C20 plugs in rear of unit for connection to typical single phase receptacles in racks

Channel	240VAC	230VAC	208VAC
P1	S1: 500W S2: 1.5kW S3: 1.5kW	S1: 500W S2: 1.4kW S3: 1.13kW	S1: 500W S2: 1.4kW S3: 1.13kW
P2	S4: 3kW	S4: 2.76kW	S4: 2.25kW
P3	S5: 3kW	S5: 2.76kW	S5: 2.25kW
P4	S6: 3.5kW	S6: 3.2kW	S6: 2.63kW
P5	S7: 3.5kW	S7: 3.2kW	S7: 2.63kW
P6	S8: 3.5kW	S8: 3.2kW	S8: 2.63kW

DIMENSIONS:

APPROXIMATE DIMENSIONS:
(10U) 17.5"H X 16.25"D X 19"W
[445 X 413 X 483 MM]


APPROXIMATE WEIGHT:
43 LBS [19.50 KG]

MANUFACTURER:
TRYSTAR

CASE DIMENSIONS:

23"H X 21"D X 22"W
[584 X 533 X 559 MM]

**APPROXIMATE WEIGHT
(WITH LOAD BANK):**
75 lbs [34 kg]

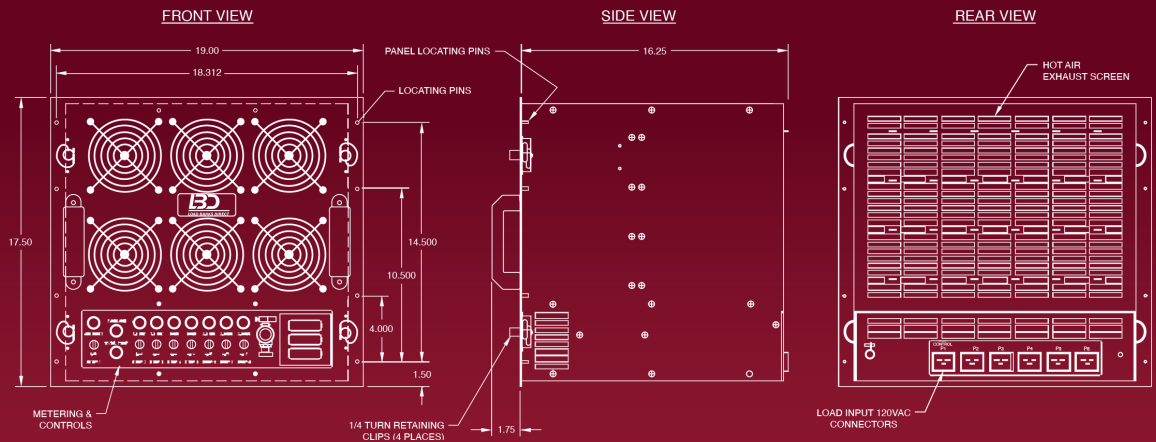

kWick Power Rentals, P.O. Box 358, Mamaroneck, NY 10543
P. (877) 383.4040 E. rent@kwickequip.com

